

### CREATING A CLEANER, SAFER, HEALTHIER WORLD.



# **S30**

## MID-SIZED RIDE-ON SWEEPER

- Deliver excellent sweeping performance and dry dust control with 3-stage SweepSmart<sup>™</sup> system
- Clean indoors and without compromising performance
- Improve operator safety with innovative cab forward design and low 80 dBA noise rating

# A QUIET AND PRODUCTIVE INDOOR/OUTDOOR SWEEPER THAT TAKES ON THE TOUGHEST ENVIRONMENTS



Engineered for reliable, industrial-strength sweeping, the Tennant S30 ride-on sweeper improves indoor and outdoor performance, significantly reduces sound levels and features the exclusive SweepSmart<sup>™</sup> dust control system.


## EXCELLENT SWEEPING PERFORMANCE

Easily pick up everything from fine grains of sand to light debris on a variety of surfaces. The Tennant S30 offers true indoor/outdoor flexibility while delivering exceptional cleaning results.


#### UNPARALLELED SAFETY

Focusing on safety, the Tennant S30 provides clear operator sightlines, reduced noise levels, and easy operation. This is achieved with a cab forward design, key material and system improvements.

INSIDE THE STATE

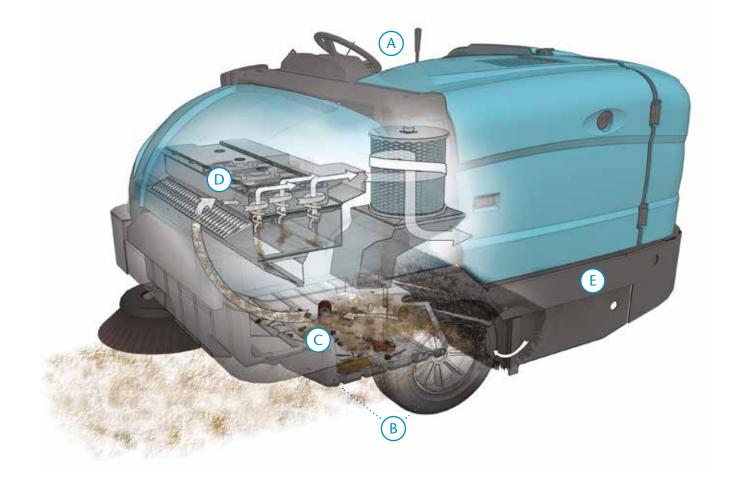

Δ	Effectively remove different types
	of debris with the II-Speed™ sweep
	system. This increases the speed of the
	main brush, side brush, and vacuum
	fan by 20%.



C Ensure operator safety, by alerting and shutting down sweeping functions, if increases in hopper temperature are sensed by Thermo-Sentry<sup>™</sup>.

Provide air flow filtration and dry dust control for sweeping all floor surfaces with the SweepSmart<sup>™</sup> system.

E

Depend on long-term structural reliability with a heavy-gauge steel machine frame designed for greater strength, rigidity, and long life.

# MAXIMUM PRODUCTIVITY, REDUCED COSTS, INCREASED SAFETY

## Reduce downtime, service time, and maintenance costs

- EasyOpen<sup>™</sup> service access
- Onboard diagnostics and patented colour coded brush wear indicator
- Large-capacity hydraulic oil tanks, triple accessory pumps and micro component in-line filter
- Soft ride, higher load capacity solid tires
- Integrated string and twine guard
- Maximise productivity indoors and outdoors
  - Dumps at any height from ground level to 1525 mm and reaches up to 760 mm into a dumpster
  - Touch-N-Go<sup>™</sup> operation with 1-Step<sup>™</sup> decreases operator training time
  - Rear hopper door contains debris during transport
  - II-Speed<sup>™</sup> sweeping increases main brush, side brush, and vacuum fan speeds up to 20%
  - Dynamic steering responsiveness and rear suspension system
  - 4-wheel stability for large area cleaning (with the S30 X4 model)
- Enhance operator safety

Achieve outstanding results in

side brushes which, combined

diverse environments with dual

- ErgoSpace<sup>™</sup> cab forward operator compartment for improved operator comfort and visibility
- Thermo-Sentry<sup>™</sup> hopper temperature sensor
- Lowest noise level for an engine-powered sweeper in this class 80 dBA

Travel between work sites safely<br/>and quickly with the S30 X4<br/>configuration that travels up to<br/>24 km/h on a stable 4 wheel<br/>platform with comfortable leaf<br/>spring suspension.Increation<br/>operation<br/>enviro<br/>certified<br/>software

Increase safety and effective operation, in even the most severe environments, with an optional FOPS (Falling Object Protection) certified (ISO 3449) cabin available with heat and air conditioning.











## SIGNIFICANTLY IMPROVE AIR QUALITY

Maintain cleaner air while delivering powerful sweeping results with the SweepSmart<sup>™</sup> dust control system. This 3-stage system filters submicron dust particles to a MERV 13 rating on the ASHRAE 20 point scale, resulting in near HEPA levels.

## STAGE 1

Keep bulky debris, moisture and dirt in the hopper with the first stage Perma-filter<sup>™</sup>.

## STAGE 2

Remove fine dust and moisture by redirecting it into the hopper with the second stage cyclonic filters.

## STAGE 3

Filter submicron dust particulates down to 0.5 microns at 99% efficiency with a third stage, flame retardant, nanofiber canister filter.

Reliably provide a clean, safe, and productive environment with SweepSmart technology.



## **GENUINE TENNANT** PARTS, SUPPLIES AND SERVICE

#### **Tennant Service Offering**

- Maximise safety, productivity and uptime
- · Control and protect your investment and lower your total cost of ownership
- Benefit from over 200 factory-trained service technicians across Europe

#### **Tennant Parts & Supplies**

- Operate your machine with confidence
- Benefit from years of worry-free operation

#### **Tennant Cleaning Solutions**

- Further your sustainable cleaning goals
- Choose sustainable benefits your company wants

## S30 RIDE-ON SWEEPER

#### SWEEPING SYSTEM

Cleaning path	
Single side brush	1590 mm
Dual side brush	2030 mm
Main brush	
Main brush length ( <i>tubular</i> )	1145 mm
Main brush lift	Mechanical or Hydraulic
Main brush change	No-tool
Side broom	
Side broom diameter	660 mm
Debris hopper	
Volume capacity	395 L
Weight capacity ( <i>plastic</i> )	490 kg
Weight capacity (steel)	545 kg
Dump height (variable to)	1525 mm
Dump reach	760 mm

Perma-filter™ Cyclonic pre-filter Nanofiber canister filter  $7.5 \text{ m}^2$ 0.5 microns @ 99% efficiency 4600 rpm 5500 rpm 280 mm

#### DUST CONTROL SYSTEM

#### **PROPELLING SYSTEM**

Propel speed forward (variable to)	13/21 km/h
Propel speed reverse (variable to)	5 km/h
Engine-gasoline/LPG	44.7 kW (Mitsubishi)
Engine-diesel	28 kW Kubota
Gradeability	
Full hopper	10° / 18%
Empty hopper	14° / 25%
Ground clearance	100 mm

#### MACHINE SPECIFICATIONS

Length Width	2360 mm 1590 mm
Height With overhead guard Without overhead guard	2095 mm 1475 mm
Weight (net)	1595 kg
Minimum aisle turn Sound level	2870 mm 80 dBA

#### WARRANTY

See your local representative for warranty information.

Specifications subject to change without notice.

## SEEING IS BELIEVING

For a demonstration or additional information contact us:

#### TENNANT UK CLEANING SOLUTIONS LTD

Gladstone Road Northampton NN5 7RX UNITED KINGDOM Tel: 0800 111 4402 (local rate UK only) Tel: 01604 583191 Fax: 0845 052 9349 E-mail: sales.uk@tennantco.com E-mail: enquiries@tennantco.com

#### **TCS EMEA GmbH** Sommerfeld 1 5202 Neumarkt am Wallersee Tel: +43 (0)6216 4524 & 4525 Fax: +43 (0)6216 4524 20 E-mail: office@tennant-cee.com

**TENNANT EUROPE NV** Roderveldlaan 3 2600 Antwerp Tel: +32 3 217 94 11 Fax: +32 3 217 94 19 E-mail: europe@tennantco.com

S30 Brochure

©2015 The Tennant Company logo and other trademarks designated with the symbol "@" are trademarks of Tennant Company registered in the United States and/or other countries. Tennant Company's products are sold and serviced through subsidiaries of Tennant Company and distributors. All rights reserved.